





## **Keeler**



# Introducing our most versatile and reliable cryo system

Building on the exceptional reliability of its predecessors, the Cryomatic MK II represents the perfect combination of reliability, automation, and clinical versatility. The innovative Cryomatic MK II features an intelligent coupling mechanism that seamlessly accommodates Keeler single-use and reusable probes without adapters, while the smart console automatically recognises the probe type and self-adjusts, streamlining your workflow.

The intuitive interface features a backlit digital display and audio feedback system, providing clear, real-time information on freeze duration, gas cylinder status, and probe functionality. Designed for maximum clinical flexibility, the system is compatible with seven specialised reusable probes for various pathologies, plus a single-use probe that eliminates sterilisation requirements. The Cryomatic MK II works efficiently with both CO2 and N20 medical gases, adapting to your specific needs and geographical requirements.

## Focused on you: Local servicing and support

With over 50 year's experience in offering opthalmic cryosurgical units, Keeler has a longstanding legacy of trust and reliability when it comes to opthalmic cryosurgery.

We're proud to manufacture and assemble our instruments in the UK and the US, providing eyecare professionals with the highest quality ophthalmic devices, ensuring optical precision and reliability in every product. However, should you need assistance, our local expert technicians offer comprehensive care including repairs, annual servicing, and warranty support as well as training on the maintenance of your cryo systems.

# Discover the benefits of the Cryomatic MK II



## Compatibility with a range of Keeler probes

The console is compatible with Keeler's own range of reusable and single-use probes to provide users with the versatility to treat a range of pathologies.

## Simple and convenient set up

The Cryomatic MK II is a complete solution for ophthalmic cryosurgery, featuring a simple graphic display, plus automated elements that allow users to be set up within a matter of minutes.

## Automation for consistent performance

Compatible with Keeler's reusable and single-use probes, the integral software automatically detects and safely adjusts to your type of probe, applying the correct pressure levels to enable optimum freezing of the pathology.



## Convenient, short purge cycle

The console ensures a short purge cycle, every time, to help to streamline your workflow, reducing preparation time between procedures. For added convenience, Keeler's single-use probes require no purge cycle at all, allowing for immediate use.



## Purging facility with reusable probes

The purging facility removes any moisture or contaminants that could affect performance, ensuring consistent and reliable use throughout procedures.



## Rapid freeze and quick defrost

The system delivers swift, controlled freezing, allowing users to precisely target pathological tissue with minimal impact to surrounding areas. This rapid response is matched by its quick defrost cycle, enabling smooth transitions between applications.

## Probes that add versatility to your cryosurgery

The Cryomatic MK II is compatible with keeler's range of reusable and single-use probes. The Cryomatic MK II console and probes can be considered a superior treatment than using laser retinopexy for the following cases:

- Treating peripheral retinal pathologies
- One-step procedure for retinal detachments. Laser retinopexy on the other hand, must be performed 24-48 hours after gas injection.
- Where there are obstructions within the eye limiting penetration of the laser, such as a cataract or vitreous opacity.

## Keeler reusable probes

Keeler's range of reusable probes provides users with versatility to treat a range of pathologies. Designed for ease of connection, there are 8 tips to choose from depending on your requirements.





- A Standard retinal probe
- B Extended retinal probe
- C Mid-reach retinal probe
- D Glaucoma probe
- E Curved cataract probe
- F Intra-vitreal probe
  - G Collins trichiasis probe
  - (H) Compact retinal probe

## Keeler single-use probes

Keeler's single-use probes have been designed in collaboration with clinicians to provide users with optimal performance and safety when treating a range of pathologies such as retinal tears, holes, Retinopathy of Prematurity (ROP), and pneumatic retinopexy. They can also be used during scleral buckle procedures for retinal detachments.

Keeler single-use probes offer the same quality, performance and precision as our renowned reusable retinal probes, whilst offering the peace of mind that a sterilized probe is on hand for every patient.



#### Orientation pip

Tactile feedback to ensure perfect placement of the tip.

#### **Ergonomic design**

The single-use probe is shaped to allow better control of the probe, with an insulated body for comfort during the freeze stage.




#### **Curved tip**

Designed with the optimum angle to ensure accurate contact with the sclera.

#### **Increased safety**

Constructed with a fail safe auto defrost feature for 100% confidence. No risk of forceful or sudden disassembly at any point in your cryosurgery procedure, ensuring that you and your patients are in safe hands.

### Technical specifications Reusable probes

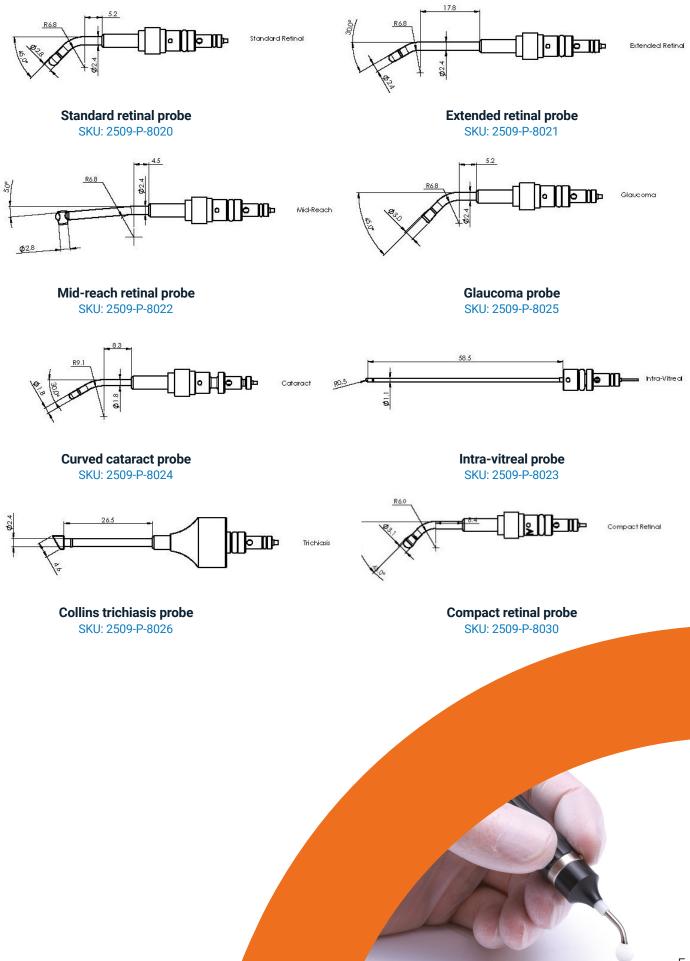

## Technical specifications Cryomatic MK II

Cryo system	2509-P-1010	
Gas specification	Medical grade Nitrous Oxide (N20) or medical grade Carbon Dioxide (CO2) in non-syphonic cylinders.	
Operating range	3100-4480kPa (450-650PSI/31-45Bar)	
Maximum cylinder pressure	8275kPa (1200PSI/83Bar)	
Display	LCD Display (95mm x 70mm)	
Electrical ratings		
Input voltage range	100-240Vac (50/60Hz)	
Power rating	15-30VA	
Fuses	2 x T2AH 250V	
Dimensions		
Width	350mm (14")	
Depth	200mm (8")	
Height	190mm (7.5")	
Weight	4.5kg (10lbs)	

#### Classification and safety standards

Complies with	EN60601-1, UL60601-1, and CAN/CSA-C22.2 No 601-1
Equipment classification	Class 1, type BF (Applied Part)
Mode of operation	Continuous
Protection against ingress	Console IPx0 Footswitch IPX7

## Technical specifications Cylinder adapters

Your Cryomatic can be used with either Carbon Dioxide (CO<sup>2</sup>) or Nitrous Oxide (N<sup>2</sup>0) gas from non-syphonic bottles via one of the Pin Index Yoke (PIY) or screw thread adapters or cyclinder adapters.



SKU: 2508-P-7017 Pin Index Yoke for E Size Nitrous Oxide Gas Cylinder

SKU: 2508-P-7015 Pin Index Yoke for E Size Carbon Dioxide Gas Cylinder



SKU: 2508-P-7016 Adapter for F Size Carbon Dioxide Gas Cylinder

SKU: 2508-P-7018 Adapter for F Size Nitrous Oxide Gas Cylinder



Size E Cylinder Dimensions (cm) 50x15 Gr. Weight (kg) 7

Size F Cylinder Dimensions (cm) 86x14 Gr. Weight (kg) 18

## Cryo accessories



SKU: 2508-P-7005 Cryo cart

## What's in the box?

- Cryomatic MK II console
- Footswitch
- Mains/power cord
- High-pressure gas hose
- Exhaust hose
- Adjustable wrench
- Instructions for use
- 2x spare mains fuses



Visit keelerglobal.com for our full range including:











Ultrasound

Clinical

Handhelds



Slit Jamps

### Contact us

Phone: +44 (0)1753 857 177 Email: sales@keeler.co.uk






**Medilas AG** Zürcherstrasse 39E CH-8952 Schlieren info@medilas.ch T +41 44 74 7 40 00 www.medilas.ch

СН





Keeler Europe Distribution, S.L. Colom, 453, nau D50 08223 Terrassa, Spain EC REP





Keeler Ltd. Clewer Hill Road, Windsor, SL4 4AA

20022025 REV A